Hydraulic CNC press brake PBF 30200

Bargain

Model	PBF 30200
Brand	HESSE by DURMA
Condition	new
Year of manufacture	2024
pressing capacity	200 to
Bending length	3050 mm
Stock number	8319
Origin	Türkiye

✓ On stock

⏱ immediately, subject to prior sale

€ 62.400,00


~~€ 77.982,00~~

Leasing*: € 1.179,36



Symbolfoto / sample photo



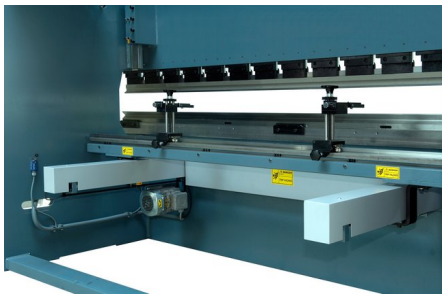

Hesse + Co Maschinenfabrik GmbH
IZ Nö Süd, Straße 4, Objekt 8
A-2351 Wiener Neudorf

www.hesse-maschinen.com

T +43-2236-63870-0
F +43-2236-63662
office@hesse-maschinen.com





General characteristics

pressing capacity	200 to
Bending length	3050 mm
Axes	Y1 / Y2 / X and R-axis
Stroke	210 mm
Inside distance between side frames	2550 mm
Gap in side frame	250 mm
Daylight	445 mm
Power concept	hydraulic
rapid speed Y-axis	100 mm/s
Working speed Y-axis	7
Retractionspeed Y-axis	73
Back gauge travel X-axis	620 (with optional R-axis: 500 mm) mm
Back gauge speed X-axis	250
Table height	858 mm
Table width	104 mm
Oiltank	150 l
Motor power	15 kW

Dimensions and weight

Length	3750 mm
Width	1390 mm
Height	2500 mm
Weight	8160 kg

Description

Special price for demo machine

Like-new condition

4 axes (Y1, Y2, X and R axis)

CNC control DT-10

- intuitive touch-screen control (simple drawing of the bending outline with your finger)

- user friendly programming in dialogue form

- automatic calculation of bending sequence

- automatic calculation of the blank sheet size
- graphic product and tool memory
- correction possibility
- USB interfaces for backup and programm transportation
- PC software, generating programms on the PC and transfer to the machine by USB

CNC controlled back gauge with linear guide and ball screw spindles

CNC controlled crowning table

intermediate clamps for upper tool

upper tool 1010/A/75°/0,8, sectioned, bending radius hardened and ground

die holder for 60 mm dies

die type 2009/85° (V 16, 22, 35, 50 mm) sectioned, geteilt, bending radii hardened and ground

laser safety device Fiessler AKAS mounted on the upper beam

sheet support arms

protection covers on the sides and back side

according to CE rules

oilfilling

users manual in GERMAN or ENGLISH

Advantges of PBF series:

- compact structure
- low cost due to serial production of standardised models without restrictions in quality and accuracy

Option:

CNC controlled crowning table	incl.
CNC controlled R-axis (adjustment range in X = 500 mm)	incl.

DBend, 3D CAD/CAM importing- and simulation program (step, iges a
nd dxf file import)

we have more than 600 references!

(sample photo)

Further information

Brochures

- Catalogue pressbrakes Durma PBF series
- Euram Abkantwerkzeuge Gesamtkatalog
- Rolleri Abkantlösungen
- Rolleri Klemmsysteme

Product video

- CNC STEUERUNG DT-10 inkl. PC-Software

Notice

Prices ex location, excluding VAT.

The General Terms and Conditions of Delivery of the Austrian Association of the Machine and Steel Construction Industry apply.
We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.

* Monthly net leasing rate, leasing period 60 months, no down payment, 5% residual value, subject to a positive credit check. The leasing conditions of GRENKELEASING GmbH apply. Valid for lessees based in Austria.