

Multifunctional CNC lathe FCL-2580

Model	FCL-2580
Brand	<u>CHEVALIER</u>
Condition	new
Swing over bed	630 mm
Distance between centers	2000 mm
Origin	Taiwan

⌚ approx. 6 months from order

€ 95.950,00


Leasing*: € 1.813,46





Symbolfoto, shows modell FCL-2560 with options



Symbolfoto, shows modell FCL-2560 with options

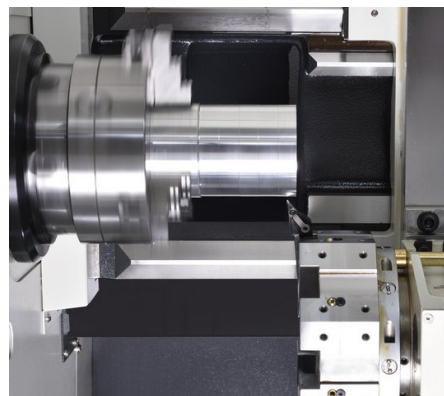

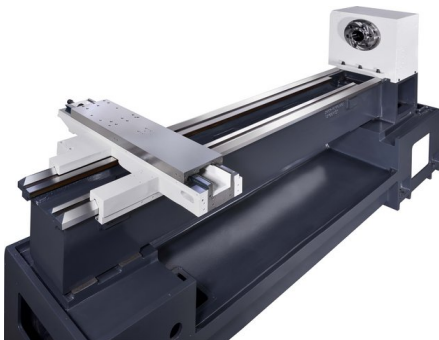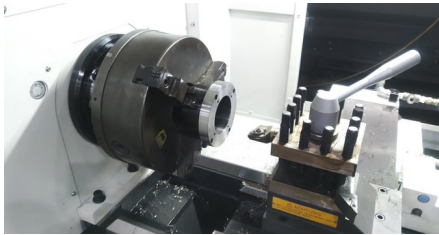

General characteristics

Swing over bed	630 mm
Distance between centers	2000 mm
Spindle bore	85 mm
swing over cross slide	400 mm
Width of bed	350 mm
Spindel nose type	D1-8
Spindle taper	1/16 M
Spindle speed steps	3
Spindle revs	37 - 2250 rpm
Cross feed	5000 m/min
Rapid traverse Z-axis	8000 mm/min
Cross slide travel	280 mm
Tailstock quill diameter	75 mm
Tailstock quill taper	5 MK
Tailstock travel	190 mm
Motor power	9 / 13.5kW (S1 / S6 40%) kW
Positioning accuracy	X: 0.02 Z: 0.04 mm
Repeat accuracy	X: 0.01 Z: 0.035 mm
Accuracy standard	ISO3655

Dimensions and weight

Length	3840 mm
Width	1905 mm
Height	2235 mm
Weight	4200 kg

Description

Three operating modes: CNC / teach-in / manual

Siemens 828D CNC control

- 12-inch colour screen
- Linear interpolation
- Circular interpolation
- Helical interpolation
- Skip function
- Workpiece coordinate system
- Coordinate system rotation
- Rigid tapping
- Mirror image, scaling and rotation
- Turning cycle
- ShopTurn software

Large spindle bore, with precision bearings for high accuracy and consistent cutting stability.

Precision ball screw Ø 40 mm (Class C5) on the Z-axis and ball screw Ø 25 mm (Class C3) on the X-axis.

2-axis AC servo motors

50–300 mm roller-type tailstock.

Manual tailstock quill, diameter 75 mm (MK5), travel 190 mm.

Programming and operating instructions.

Electronic handwheel for X and Z axes

Manual 4-station tool holder (25 x 25 mm)

Automatic lubrication system

Fully enclosed splash guard with sliding door and window

Chip container with coolant tank

Inspection report

LED work light

Coolant system

Preparation for oil cooling system

Options (prices on request):

Fagor control system instead of Siemens

Manual or hydraulic chuck

8-station turret (VDI, slot type o BMT version), optionally with driven tools

Electrically rotatable 4-station tool holder

Chip conveyor
High-pressure coolant pump
Further options on request

Alternative:

FCL-2540 variant with 1000 mm centre distance
FCL-2560 variant with 1500 mm centre distance

Further information

Brochures

- [Katalog CNC Drehmaschinen Chevalier FCL Serie](#)

Product video

- [ypyv2due-o.youtube](#)

Notice

Prices ex location, excluding VAT.

The [General Terms and Conditions of Delivery](#) of the Austrian Association of the Machine and Steel Construction Industry apply.

We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.

* Monthly net leasing rate, leasing period 60 months, no down payment, 5% residual value, subject to a positive credit check. The leasing conditions of [GRENKELEASING GmbH](#) apply. Valid for lessees based in Austria.