Hydraulic CNC press brake AD-S 30175

Bargain

Model	AD-S 30175
Brand	HESSE by DURMA
Condition	new
Year of manufacture	2026
pressing capacity	175 to
Bending length	3050 mm
Stock number	80248
Origin	Türkiye

✓ On stock


⏱ immediately, subject to prior sale

€ 82.600,00


~~€ 93.401,00~~

Leasing*: € 1.561,14



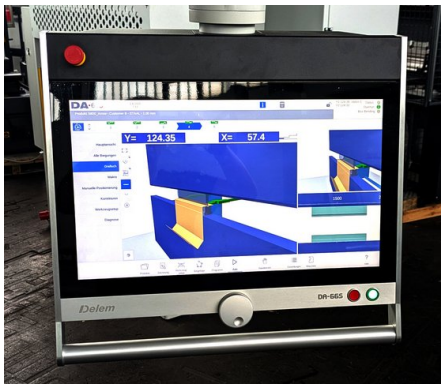



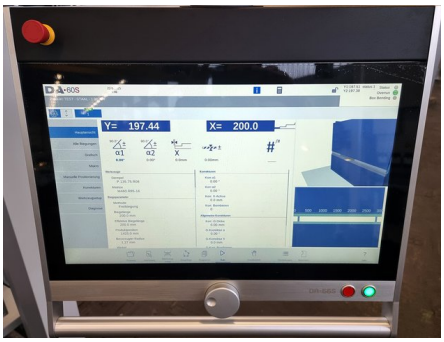

General characteristics

Hesse + Co Maschinenfabrik GmbH
IZ Nö Süd, Straße 4, Objekt 8
A-2351 Wiener Neudorf

www.hesse-maschinen.com

T +43-2236-63870-0
F +43-2236-63662
office@hesse-maschinen.com

pressing capacity	175 to
Bending length	3050 mm
Axes	Y1 / Y2 / X und R-Achse
Stroke	265 mm
Inside distance between side frames	2600 mm
Gap in side frame	450 mm
Daylight	530 mm
Power concept	hydraulic
rapid speed Y-axis	160 mm/s
Working speed Y-axis	10
Retractionspeed Y-axis	100
Back gauge travel X-axis	650 mm
Back gauge speed X-axis	500
Back gauge speed R-axis	350 mm/s
Back gauge travel R-axis	250 mm
Table height	900 mm
Table width	104 mm
Oiltank	250 l
Motor power	18.5 kW

Dimensions and weight

Length	4250 mm
Width	1700 mm
Height	2850 mm
Weight	10900 kg

Description

4 axes (Y1, Y2, X and R)

Color graphics control Delem DA 66 S

- 2D graphical touch screen programming mode

- 3D machine representation, in simulation and production

- 24" high resolution color TFT

- Delem Modusys compatibility (module scalability and adaptivity)

- USB, peripheral interfacing

- User specific application support within the control's multitasking environment

- Sensor bending & correction interface

- Profile-S2D offline software

servo motorized back gauge on linear guides and ball screws

back gauge finger blocks on double linear guides

CNC crowning table

Upper tool Rolleri PS.135.85.R08, 3 x 835 mm + 1 x 805 mm geteilt

Lower tool Rolleri M.460.R, V= 16, 22, 35 und 50 mm, 3 x 835 mm + 1 x 805 mm geteilt

laser safety device Fiessler AKAS mounted on the upper beam

linear guided sheet support arms

according to CE rules

oilfilling

users manual in English or German

Advantages of AD-S compaired to PBF:

- more stroke, installation height and throat

- higher approach and retraction speed of the top beam

- higher backgauge speed

- backgauge finger on double instead of single linear guide

- more options available such as: additional backgauge axes (e.g. Z1/Z2, Delta X, up to 6 axes), bending aids, laser angle measuring system, tandem design, other CNC controls ...

Further information

Brochures

- Katalog Abkantpressen Durma AD-S Series
- Euram Abkantwerkzeuge Gesamtkatalog

Product video

- pswxfelqn5c.youtube

Notice

Prices ex location, excluding VAT.

The General Terms and Conditions of Delivery of the Austrian Association of the Machine and Steel Construction Industry apply.
We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.

* Monthly net leasing rate, leasing period 60 months, no down payment, 5% residual value, subject to a positive credit check. The leasing conditions of GRENKELEASING GmbH apply. Valid for lessees based in Austria.