

Hydraulic CNC press brake AD-R 30175


Bestseller

Model	AD-R 30175
Brand	<u>HESSE by DURMA</u>
Condition	used
Year of manufacture	2022
pressing capacity	175 to
Bending length	3050 mm
Stock number	8266
Origin	Türkiye

✓ On stock

🕒 immediately, subject to prior sale

€ 55.900,00

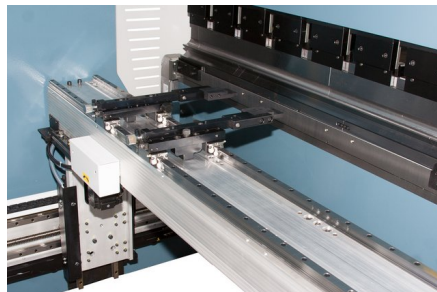

General characteristics

pressing capacity	175 to
Bending length	3050 mm
Axes	Y1 / Y2 und X axis
Stroke	265 mm
Inside distance between side frames	2600 mm
Gap in side frame	450 mm
Daylight	530 mm
Power concept	hydraulic
rapid speed Y-axis	160 mm/s
Working speed Y-axis	10
Retractionspeed Y-axis	100

Back gauge travel X-axis	650 mm
Back gauge speed X-axis	500
Back gauge speed R-axis	140 mm/s
Back gauge travel R-axis	250 mm
Table height	900 mm
Table width	104 mm
Motor power	18.5 kW

Dimensions and weight

Length	4250 mm
Width	1800 mm
Height	2890 mm
Weight	10520 kg

Description

demo machine - mint condition

3 axes (Y1, Y2, X)

CNC control DT-15

- 2D graphic display 15"

- intuitive touch-screen control (simple drawing of the bending outline with your finger)

- user friendly programming in dialogue form

- automatic calculation of the bending sequence

- automatic calculation of the blank sheet size

- graphic product and tool memory

- correction possibility

- USB interfaces for backup and programm transportation

- PC software, generating programmes on the PC and transfer to the machine by USB

servo motorized back gauge on linear guides and ball screws

back gauge finger blocks on double linear guides

CNC crowning table

intermediate clamps for upper tool

upper tool 1010/A/75°/0,8/105, sectioned, bending radius hardened and ground

die holder for 60 mm dies

die type 2009/85° (V 16, 22, 35, 50 mm) sectioned, geteilt, bending radii hardened and ground

laser safety device Fiessler AKAS mounted on the upper beam

linear guided sheet support arms

protection covers on the sides and back side

according to CE rules

oilfilling

users manual in English or German

Advantages of AD-R compared to PBF:

- more stroke, daylight opening and gap in side frame
- higher approach- and retraction speed of upper beam
- higher back gauge speed
- back gauge fingers on double instead of single linear guide
- more available options as Z1/Z2 axes, tandem execution, other CNC controls ...

(sample photo)

We have more than 620 references!

Further information

Brochures

- [ad-r_en-1.pdf](#)
- [Euram Gesamtkatalog](#)
- [Rolleri Abkantlösungen](#)
- [Rolleri Klemmsysteme](#)

Product video

- [HESSE by DURMA DT 15 CNC Steuerung](#)

Notice

Prices ex location, excluding VAT.

The [General Terms and Conditions of Delivery](#) of the Austrian Association of the Machine and Steel Construction Industry apply.

We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.