


## HD-FN 6020

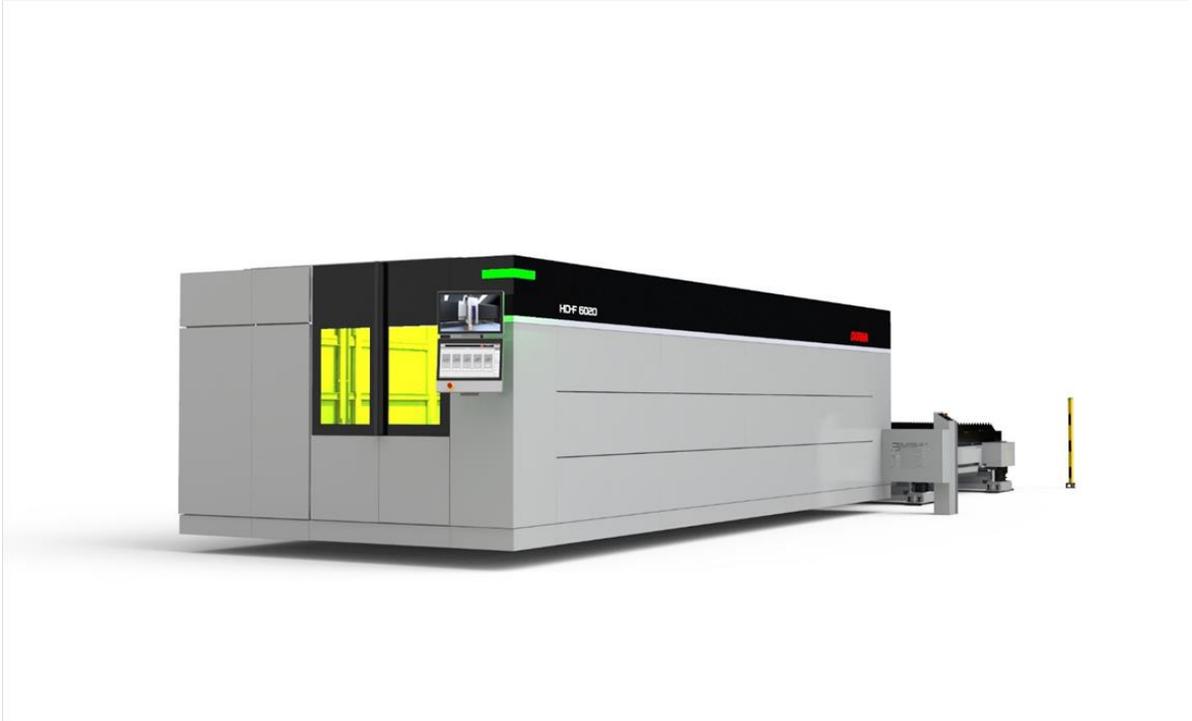

<b>TECHNICAL DATA</b>		
<b>Cutting Axes</b>		
X Axis	6100	mm
Y Axis	2070	mm
Z Axis	125 (270)	mm
Max. Sheet Size	6096x2032	mm
Max. Sheet Weight Per Square Meter for One Table	240 (for 3...12kW) / 400 (for 15-20kW)	kg/m <sup>2</sup>
Max. Total Sheet Weight for Double Table	5800 (for 3...12kW) / 9600 (for 15-20kW)	kg
<b>Dynamics</b>		
Max. Speed X-axis	100	m/min.
Max. Speed Y-axis	100	m/min.
Max. Speed Z-axis	30	m/min.
Max. Synchronous Speed (X-Y)	141	m/min.
Max. Synchronous Acceleration	14	m/s <sup>2</sup>
Positional Accuracy	± 0,05	mm
Repeatability	± 0,05	mm
Table Change Time	42	sec.
Edge Dedection Accuracy*	± 1	mm
<b>Control Unit</b>		
CNC	MTX consisting of Hardware XM42	
PC: PCU50.3	18.5" Multitouch Panel	
<b>Laser Cutting Head</b>		
Type	Durma Cutting Head	
Focus Length	150 (for 3-4-6 kW) / 200 (for 12-15-20 kW)	
Focus	Automatic	
<b>Filter**</b>		
Capacity	6000(for 3-4-6 kW)/8000(for 12-15-20 kW)	
Power	7,5	
<b>Chiller</b>		
Chiller for 3 kw	Durma DC-3000	
Chiller for 4 kw	Durma DC-4000	
Chiller for 6 kw	Durma DC-6000	
Chiller for 10-12 kw	Durma DC-12000	
Chiller for 15-20 kw	Durma DC-20000	
-	-	

\*Edge Dedection Accuracy may vary depending on the edge radius and quality of the sheet.

\*\*A larger capacity filter is used in machines of 10kW and above.


Max. Cutting Thickness depending on Laser Power*						
Material	3 kW	4 kW	6 kW	12 kW	15 kW	20 kW
Mild Steel S235	16 (20)	20 (22)	25	30	35 (40)	40 (50)
Stainless Steel (304)	8 (10)	10 (12)	15 (20)	25 (30)	35 (40)	40 (50)
Aluminum (5083)	8 (10)	12 (15)	20 (25)	30 (40)	35 (40)	40 (50)
Copper	5	6	10	15	15	15
Brass (CuZn39 Pb3)	8	10	12	20	20	20

\* Values given are for cutting with acceptable clean cutting surface. Values inside ( ) are possible to cut, but some dross.

AVERAGE ELECTRICAL CONSUMPTION OF THE MACHINE (kW)		
	LASER SOURCE POWER	AVERAGE CONSUMPTION (Kw)
RESONATOR	3 KW	5.7
	4 KW	7.8
	6 KW	8.8
	12 KW	18.3
	15 KW	20.9
	20 KW	23.1
CHILLER 1	3 KW	7.8
	4 KW	7.8
	6 KW	7.8
	12 KW	8.1
	15 KW - 20 KW	8.1
CHILLER 2		0
FILTER		7.5
ELECTRICAL PANEL		8.9

TOTAL POWER	3 KW	29.9
	4 KW	32
	6 KW	33
	12 KW	42.8
	15 KW	45.4
	20 KW	47.6

LAYOUT AND DIMENSIONS

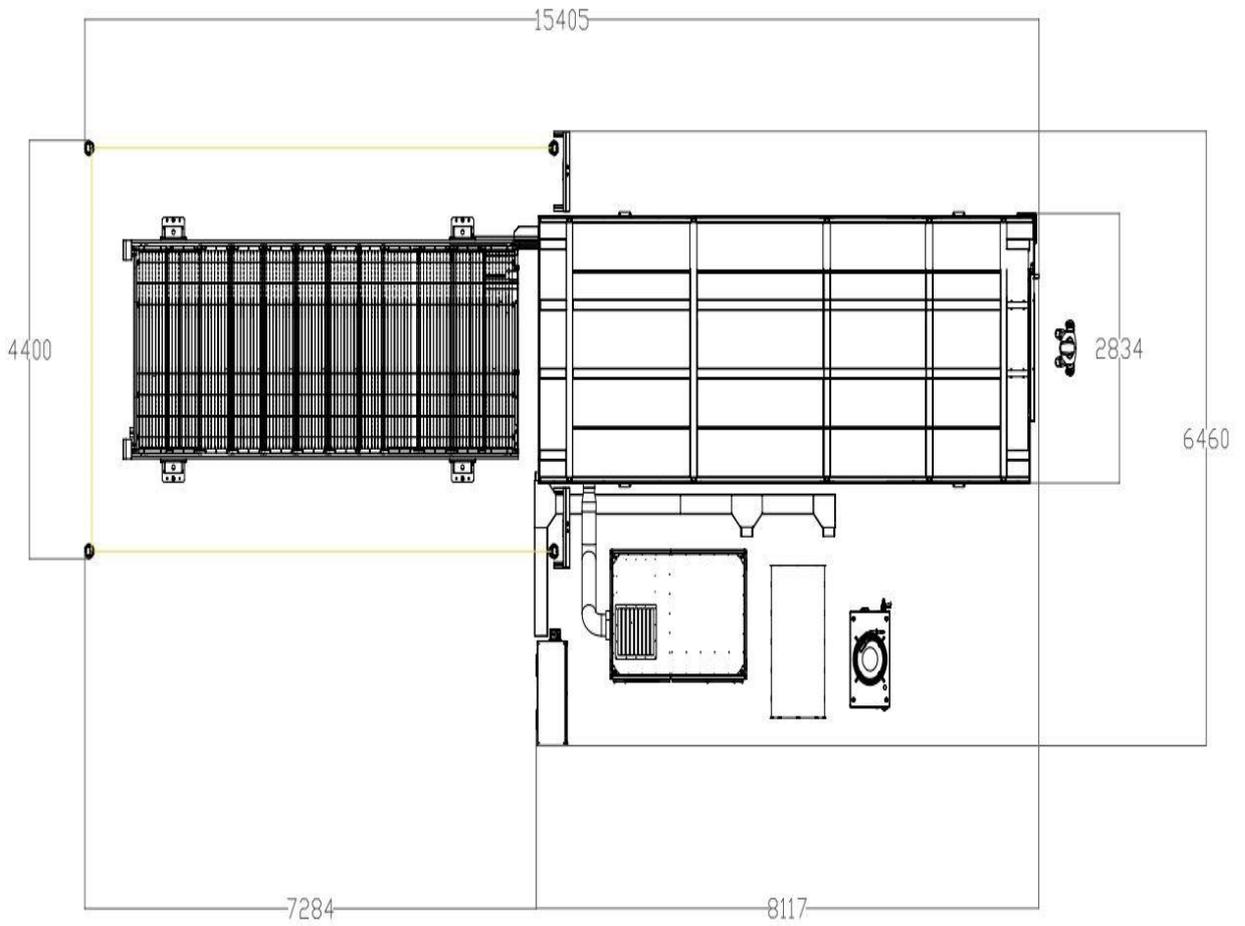


## Vertrauen Sie auf über 70 Jahre Erfahrung!

Die Firma HESSE+CO wurde 1947 als Hersteller von Blechbearbeitungsmaschinen gegründet. Seit 1980 sind wir auf den Handel mit neuen sowie gebrauchten Blechbearbeitungs- und Werkzeugmaschinen spezialisiert. Wir haben ständig etwa 300 Maschinen in unserer 2.000 m<sup>2</sup> großen Ausstellungshalle, die nur 20 Minuten vom internationalen Flughafen Wien entfernt ist.

## Trust in more than 70 years of experience!

HESSE+CO was established in 1947 as a manufacturer of sheet metal working machines. Since 1980 we are specialized in dealing with new and second hand sheet metal processing machines and machine tools. We always have approximately 300 machines available in our 2.000 m<sup>2</sup> showroom, which is located only 20 minutes from the Vienna International Airport, waiting for your inspection.

[www.hesse-maschinen.com](http://www.hesse-maschinen.com)

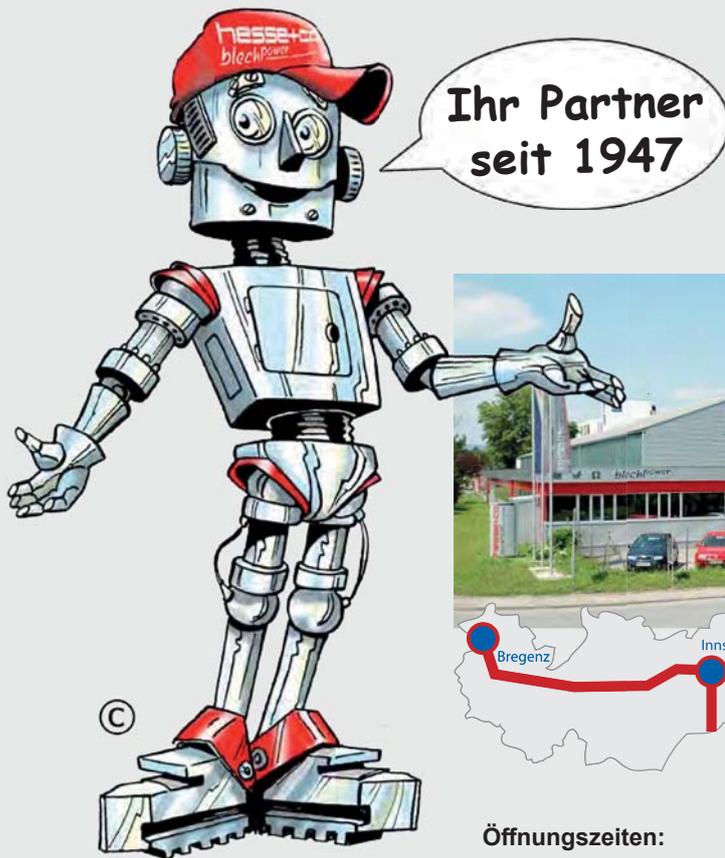

### Öffnungszeiten:

Mo - Do 8:00 - 16:30 Uhr  
Fr 8:00 - 14:30 Uhr

HESSE+CO Maschinenfabrik GmbH  
Industrienzentrum NÖ-Süd  
Straße 4 - Objekt 8  
A-2351 Wiener Neudorf  
AUSTRIA

**hesse** **hesse+co**  
*blechpower*  
maschinen und werkzeuge

Technische Änderungen, Irrtum und Druckfehler vorbehalten.  
Gültig bis auf Widerruf.

Tel.: +43/2236/638 70-0  
Fax: +43/2236/636 62  
[office@hesse-maschinen.com](mailto:office@hesse-maschinen.com)  
[www.hesse-maschinen.com](http://www.hesse-maschinen.com)  
[www.blechpower.com](http://www.blechpower.com)