





Series





Reliable Efficient Ergonomic High Capacity Low Investment Cost







As a total supplier for sheet metal manufacturing with almost 70 years of experience, Durma understands and recognizes the chal-lenges, requirements and expectations of the industry. We strive to satisfy the ever higher demands of our customers by continuously improving our products and processes while researching and implementing the latest technologies

In our three production plants with a total of 150.000 m², we dedicate 1,000 employees to delivering high quality manufacturing solutions at the best performance-to-price ratio in the market.



PRODUCTION IS MORE EFFECTIVE NOW

From the innovations developed at our Research & Development Center to the technical support given by our worldwide distributors, we all have one common mission: to be your preferred partner.

Durmazlar offers it's machines to the world markets under the Durma brand.





1

High technology, modern production lines



Top quality components




High quality machines designed in R&D Centre

PBH Series Profile Bending Machines

"Fast, Accurate and Easy to Operate"

Robust machine frame is rugged steel construction, machined after the welding for rigidity. Precise bending by large shaft diameters and bearings also minimizes deflection. Longlife of machine by strong frame and world class components. Short cycle times by high drive torque and speed. Minimised straight edge by hydraulic adjustments Low energy and maintainence costs by friction free planetary swing guides. Powerful guide rolls.

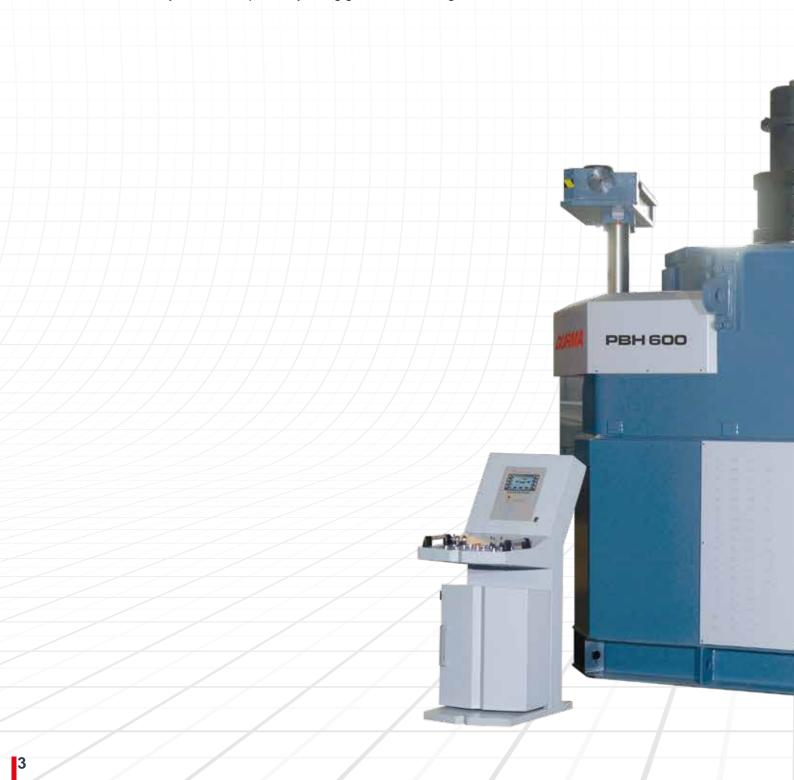



PBH Series Profile Bending Machines

■ PBH 60

PBH 60 are expressly designed for rolling profiles with high resistance to the bending. This is the reason why the structures are heavily dimensioned and are built with heavy thickness plates of certified quality steel.



■ PBH 80-100-125

Side rolls are guided by swing beds which allows them to act as 2 independent axes moving on curve shape orbits. Side rolls are approaches to the top roll on curve movement which allows to get perfect prebendings as well as spring back minimisation. (Rectilinear Rolls System designed for top roll dia more than 460 mm).



PBH 180-240-300-360-600

For heavy and fine bendings PBH series provides easy operating. All shafts are powered by seperate equepments so that the machines have high level bending forces. Renovated side support system provides high rigidity.

■ PBH-4 Special Aplication

4 rollers profile bending created for the minimum pre-bending levels.



Planetary Swing Rolls System

Rolls are guided by swing beds which allows them to act as 2 independent axes moving on curve shape orbits. Rolls are approaches to the top roll on curve movement which allows to get perfect prebendings as well as spring back minimisation.



Strengthen Bearing System

Rolls are guided with spherical roller bearings and bronze housings. Guiding system requires less lubrication and keeps it precision in long term.



■ High Torque Drive System

High Torque Drive System enables Durma roller bending machines to bend metal sheets with less steps. PBH 60 to 125 machines has top and bottom rolls powered by planetary reducer, hydraulic motor and gear system. PBH 180 to 600 machines has top and side rolls powered by planetary reducer, hydraulic motor and gear system. Strong Hydraulic Brake system does not allow the profile to slip back. Pressure safety valves are protecting the hydromotor and other components from overloads and peak pressures.



High Strengthen Shaft and Balls

DURMA PBH Machine shafts and rollers manufactured from certified and crack controlled high strength tempered steel. On CNC machines are handled high sensitivity and tolerance without causing notch effect.



Side Support System

There are 3-axis movable hydraulic side support on both sides of the machine. Back - Forth and rotation movements controlled by single hydraulic cylinder drive system. Bending profile to be continuously vertical by automatically positioned to provide side support . Side support system is suitable for bending iron angles and it is standard for PBH 60 and upper machines.



Digital Display

Rolls are positioned by hydraulic components. The precision of axes are maintained through the use of Bosch Rexroth valves. Pressure safety valves protect against peak pressures and overloads.



NC Control

Electrical system is designed compatible with CE safety regulations. The system consists of well known electrical components. The system is protected by current overloadings for its components, power supplies and motors.



Hydraulic System

The standard control unit ensures that machine's bottom and side rollers operate smoothly.



User Friendly Control Unit HRB-4

PBH Series Features

Puller Aparatus

The deformation problem is reduced with big ratio by special deformation blocker I, H bending apparatus.



Special Aplication


On one step, straight sheet becomes U form, then performes circular bends.



Special Aplication

Apparatus and table for special and heavy spiral bends.



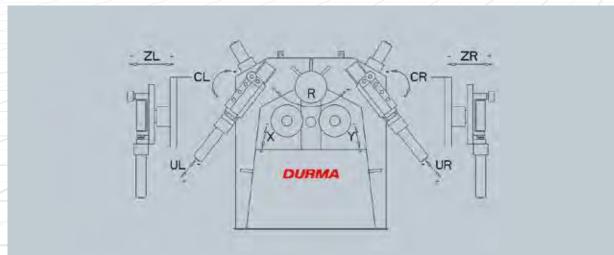

STANDARD & OPTIONAL EQUIPMENT

Standard Equipment

CE

Digital readout (X,Y axis)

All rolls driven by planetary gear box and hydramotor (PBH 80 to 125)

All rolls 3 different planetary gear box and hydramotor driven (PBH 180 to 600)

Special support for angle profile

3 axis (Z, U, C) side supports Z hydraulic control (PBH 80 to 100)

3 axis (Z, U, C) side supports full hydraulic control (PBH 125 to 600)

Movable command panel seperate from the machine

Horizontal working feature

Vertical working feature (PBH 60 to 125)

Stress relieved stell construction body

Electrical and hydraulic protection against overloads

1 set standard hardened and ground rolls made by special steel

Optional Equipment

Digital readout for Z Axis

Tai bar for upper roll

NC control system

Adjustable turning speed

Oil cooler

Oil heater

Special rolls (Pipe, profile, angle iron)

Special aparatus to prevent deformation on U-I-H bending

Spiral bending apparatus

Technical Details

| NG | | | PBH 60 | | PBH 80 | | 1 100 | PBH | NOTES | |
|---------|-------------|------------------------|-----------------|-----------------------|-----------------|-------------------------|-----------------|-------------------------|----------------------|-----|
| NO | PROFILE TY | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | |
| 1 | | 40x40 20x20 | 500 300 | 50x50 30x30 | 500 300 | 60x60 30x30 | 700 400 | 75x75 35x35 | 750 500 | 0 |
| 2 | | 70x10 30x10 | 600 250 | 80x20 30x10 | 500 350 | 100x25 40x10 | 1500 400 | 120x25 50x10 | 1300 500 | 0 |
| 3 | | 90x25 50x5 | 500 250 | 120x30 50x10 | 650 300 | 180x35 60x10 | 900 400 | 200x40 100x10 | 1200 500 | 0 |
| 4 | | 60x7 20x3 | 600 250 | 80x9 30x4 | 1000 300 | 120x13 1200 30x4 400 | | 130x14 30x4 | | |
| 5 | 4 | 60x7 20x3 | 600 250 | 80x9 1000 30x4 300 | | 100x11 1000 30x4 400 | | 120x13 1200 30x4 500 | | 0 |
| 6 | | 60x7 20x3 | 800 250 | 80x9 30x4 | 1300 300 | 100x11 30x4 | 1300 400 | 100x12 30x4 | 1200 500 | 0 |
| 7 | | 50x5 30x3 | 500 250 | 80x8 30x3 | 800 450 | 100x10 40x4 | 1400 700 | 120x12 50x5 | 1300 700 | • |
| 8 | | 50x5 30x4 | 1000 350 | 80x8 30x3 | 1200 450 | 100x12 40x4 | 1600 700 | 100x10 50x5 | 1200 700 | • |
| 9 | | 60x60x4 | (1) | 70x70x4 | (1) | 80x80x5 | (1) | 100x100x6 | (1) | 0 • |
| 10 | | 80x40x3 | (1) | 80x40x4 | (1) | 100x50x6 | (1) | 140x40x3 | (1) | 0 • |
| 11 | • | Ø40 Ø20 | 500 300 | Ø50 Ø20 | 500 350 | Ø70 Ø30 | 800 400 | Ø85 Ø40 | 850 500 | • |
| 12 | 0 | Ø60.3x3.9 Ø21.3x2.7 | 600 250 | Ø88.9x4 Ø26.9x2.6 | 1000 300 | Ø114.3x4.5 Ø33.7x3.2 | 1600 450 | Ø5"x5 Ø11/4"x3.2 | 1500 500 | • |
| 13 | 0 | Ø60x2 Ø20x1 | 600 250 | Ø100x2,5 Ø20x1 | 1300 300 | Ø120x2.5 Ø30x2 | 1400 400 | Ø140x3 Ø40x2 | 1500 500 | • |
| 14 | | UPN 80 UPN 30 | 550 250 | UPN 120 UPN 30 | 850 300 | UPN 160 UPN 30 | 800 400 | UPN 220 UPN 40 | 1000 500 | 0 |
| 15 | | UPN 80 UPN 30 | 800 250 | UPN 120 UPN 30 | 1000 450 | UPN 160 UPN 30 | 1000 400 | UPN 220 UPN 40 | 1200 500 | 0 |
| 16 | | | | | | | | UPN 100 UPN 50 | 8000 (1) 2000 (1) | • 🛦 |
| 17 | | IPE 80 | 600 | IPE 120 | 600 | IPE 180 IPE 80 | 1000 500 | IPE 200 IPE 80 | 1000 500 | 0 • |
| 18 | | a l | | | | | | IPE 120 IPE 80 | 2500 (1) 1000 (1) | • 🛦 |
| 19 | | Ì | | | | HEA 120 HEB 100 | 1000 1200 | HEA 140 HEB 120 | 1200 1300 | 0 • |
| 20 | | 3 | | | | | | HEA 120 HEB 100 | 4000 (1) 3000 (1) | • 🛦 |
| Shaft | diameter m | m | Ø60 | | Ø85 | | Ø110 - Ø100 | | Ø140 - Ø120 | |
| Roll di | ameter m | m | Ø177 | | Ø247 | | Ø315 | | Ø380 | |
| Motor | Power k' | ٧ : | 3+1.5 | | 7.5 | | 11 | | 15 | |
| Turnin | g Speed m/r | nin. | 5 | | 7 | | 8 | | 9 | |
| Weigh | t k | g | 950 | | 2350 | | 3360 | | 4600 | |
| Lengtl | n m | m | 1160 | 1580 | | 1750 | | 1850 | | |
| Width | m | m | 1000 | 1200 | | 1340 | | 1550 | | |

⁽¹⁾ Can be changed according to deformation. O Standart Rolls • Special Rolls • Special Apparatus

All datas given according to 240 N/mm² yield point.

| NO | PROFILE TYPE | | PBH 180 | | PBH 240 | | PBH 300 | | PBH 360 | | PBH 500 | | PBH 600 | | NOTES |
|----------------|--------------|----------|--------------------|-----------------|--------------------|-----------------|--------------------|-----------------|--------------------|-----------------|----------------------|-----------------|----------------------|-----------------|-------|
| | | YPE | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | |
| 1 | | | 90x90 | 1300 | 110x110 | 1500 | 150x150 | 2200 | 200x200 | 2500 | 240x240 | 2500 | 300x300 | 2800 | 0 |
| 2 | | | 150x30 | 1000 | 175x40 | 1200 | 250x60 | 2000 | 300x80 | 3000 | 400x60 | 2800 | 500x110 | 3000 | 0 |
| 3 | | 7 | 250x40 | 1000 | 350x50 | 900 | 450x70 | 1000 | 500x100 | 1800 | 650x100 | 1800 | 900x150 | 2000 | 0 |
| 4 | | 3 | 150x15 | 1400 | 160x20 | 1500 | 200x28 | 2000 | 200x28 | 1600 | 200x28 | 1600 | 200x28 | 1600 | 0 • |
| 5 | 4 | 7 | 150x15 | 1300 | 160x20 | 1500 | 200x28 | 2000 | 200x28 | 1500 | 200x28 | 1500 | 200x28 | 1300 | 0. |
| 6 | | a | 130x15 | 1800 | 150x20 | 2000 | 200x20 | 2800 | 200x28 | 2300 | 200x28 | 2300 | 200x28 | 2000 | 0 • |
| 7 | | ユ | 150x15 | 1200 | 160x20 | 1600 | 200x28 | 2300 | 200x28 | 1800 | 200x28 | 1800 | 200x26 | 1300 | • |
| 8 | | 3 | 130x15 | 1400 | 150x20 | 1600 | 200x20 | 2300 | 200x28 | 2000 | 200x28 | 2000 | 200x26 | 1500 | • |
| 9 | | 1 | 120x120x8 | (1) | 150x150x8 | (1) | 200x200x10 | (1) | 300x300x12 | (1) | 400x400x15 | (1) | 500x500x20 | (1) | 0 • |
| 10 | | a | 180x70x8 | (1) | 200x75x8 | (1) | 200x150x10 | (1) | | | | | | | 0. |
| 11 | | • | Ø100 | 1000 | Ø130 | 1600 | Ø170 | 1800 | Ø220 | 2300 | Ø260 | 2000 | Ø360 | 3000 | 0. |
| 12 | 0 | 0 | Ø170x6 | 2800 | Ø220x8 | 2800 | Ø300x10 | 4000 | Ø406x12,7 | 8000 | Ø500x15 | 16500 | Ø610x17,5 | 25000 (1) | • |
| 13 | 1 | 1 | UPN 300 | 1400 | UPN 360 | 1400 | UPN 500 | 2250 | UPN 600 | 1500 | UPN 1000 | 4000 | UPN 1000 | 3500 | 0 |
| 14 | | | UPN 300 | 1700 | UPN 360 | 1600 | UPN 500 | 2600 | UPN 600 | 1500 | UPN 1000 | 4000 | UPN 1000 | 3500 | 0 |
| 15 | | D | UPN 160 | 10000 (1) | UPN 200 | 12000 (1) | UPN 260 | 10000 (1) | UNP 320 | 20000 (1) | UNP 400 | 40000 (1) | UPN 600 | 85000 (1) | •4 |
| 16 | | Ì | IPE 300 | 1400 | IPE 360 | 1500 | IPE 500 | 2000 | IPE 600 | 2000 | IPE 1000 | 5000 | IPE 1000 | 5000 | 0. |
| 17 | | Ð | IPE 160 | 4000 (1) | IPE 200 | 5000 (1) | IPE 300 | 13000 (1) | IPE 360 | 20000 (1) | IPE 550 | 20000 (1) | IPE 600 | 26000 (1) | • 🛦 |
| 18 | | I | HEA 180 HEB 120 | 1200 1200 | HEA 240 HEB 200 | 1500 1500 | HEA 320 HEB 280 | 2500 2000 | HEA 600 HEB 500 | 3000 3000 | HEA 1000 HEB 1000 | 6000 8000 | HEA 1000 HEB 1000 | 5000 7000 | 00 |
| 19 | | B | HEA 120 | 4000 (1) | HEA 180 | 4500 (1) | HEA 220 | 10000 (1) | HEA 360 | 35000 (1) | HEA 550 | 40000 (1) | HEA 600 | 40000 (1) | •4 |
| 20 | | H | HEB 120 | 3000 (1) | HEB 160 | 3200 (1) | HEB 200 | 6000 (1) | HEB 340 | 15000 (1) | HEB 500 | 30000 (1) | HEB 550 | 40000 (1) | •4 |
| Shaft diameter | | mm | Ø180 - Ø160 | | Ø240 - Ø220 | | Ø300 - Ø280 | | Ø360 | | Ø360 | | Ø420 - Ø400 | | |
| Roll diameter | | mm | Ø460 | | Ø550 | | Ø740 | | Ø780 | | Ø800 | | Ø800 | | |
| Motor Power | | kW | 30 | | 37 | | 55+15 | | 77 | | 90 | | 120 | | |
| Turning Speed | | m/min. | 7 | | 6 | | 5 | | 5 | | 5 | | | 7 | |
| Veight | | kg | 8600 | | 16000 | | 24000 | | ~45000 | | ~55000 | | 78 | 000 | |
| ength | | mm | 2500 | | 2900 | | 3850 | | ~6000 | | ~6500 | | 61 | 00 | |
| Vidth | | mm | 20 | 00 | 23 | 600 | 30 | 150 | ~5000 | | ~5300 | | 51 | 50 | |
| | | mm | 19 | 00 | 21 | 50 | 28 | 600 | ~35 | 500 | ~37 | '50 | 43 | 600 | |

⁽¹⁾ Can be changed according to deformation. O Standart Rolls All datas given according to 240 N/mm² yield point.

PBM Series Profile Bending Machines

Motorised Profile Bending



Technical Details

| | | | PB | M 30 | PBI | M 50 | PBI | NOTES | |
|-------------------|------------|----------|----------------------|-----------------|----------------------|-----------------|----------------------|-----------------|------|
| NO | PROFILE TY | /PE | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | Dimensions | Min.inter. Dia. | |
| 1 | | | 30x30 10x10 | 650 200 | 35x35 20x20 | 1200 400 | 35x35 15x15 | 600 300 | 0 |
| 2 | | | 50x10 20x6 | 700 300 | 60x10 30x10 | 800 350 | 60x10 20x10 | 600 300 | 0 |
| 3 | | | 80x15 30x6 | 700 500 | 100x15 50x10 | 750 500 | 80x15 50x20 | 600 450 | 0 |
| 4 | T | 7 | 50x6 20x3 | 600 400 | 60x7 30x4 | 900 500 | 50x6 20x3 | 650 300 | 0 • |
| 5 | 4 | | 50x6 20x3 | 600 400 | 60x7 30x4 | 900 500 | 50x6 20x3 | 650 300 | 0 • |
| 6 | | | 50x6 20x3 | 700 400 | 60x7 30x4 | | | 800 300 | 0 • |
| 7 | | | 40x5 30x4 | 500 350 | 50x5 40x4 | 850 500 | 50x6 30x3 | 600 400 | • \$ |
| 8 | | | 40x5 30x4 | 600 400 | 50x5 40x4 | 1200 800 | 50x6 30x3 | 900 600 | • \$ |
| 9 | | | 40x40x3 | (1) | 60x60x3 | (1) | 45x45x3 | (1) | 0 |
| 10 | | D | 50x30x3 | (1) | 50x40x3 | (1) | 60x30x3 | (1) | 0 • |
| 11 | | • | Ø30 Ø10 | 650 200 | Ø35 Ø15 | 800 300 | Ø35 Ø20 | 600 300 | • |
| 12 | 0 | 0 | Ø48.3x3.2 Ø13.5x2 | 800 300 | Ø48,3x3.2 Ø17,2x2 | 650 350 | Ø60.3x2.9 Ø21.3x2 | 1000 350 | • |
| 13 | 0 | 0 | Ø60x1.5 Ø20x1.5 | 1000 550 | Ø70x2 Ø30x2 | 1200 500 | Ø60x2 Ø30x2 | 1000 450 | • |
| 14 | 1 | Z | UPN 50 | 450 | UPN 60 | 600 | UPN 80 UPN 30 | 800 400 | • |
| 15 | | | UPN 50 | 550 | UPN 60 | 750 | UPN 80 UPN 30 | 1200 600 | • |
| Shaft diameter mm | | mm | Ø30 | | | 50 | Ø | | |
| _ | | mm | Ø150 | | Ø. | 165 | Ø. | | |
| | | kW | 0.75 | | 1.5 | | 1.5+ | | |
| Turning Speed | | /min. | 3.6 | | 3.6 | | 3 | | |
| Weight | | kg | 200 | | | 85 | 6 | | |
| - 3 | | mm | | 00 | | 30 | 10 | | |
| Width mi | | mm mm | | 200 | | 30 400 | 7 13 | | |

⁽¹⁾ Can be changed according to deformation. O Standart Rolls • Special Rolls • Special Support Rolls For Angle All datas given according to 240 N/mm² yield point.

STANDARD & OPTIONAL EQUIPMENT

Standard Equipment

CE

1 set standard hardened and ground rolls made by special steel Mechanic side supports

Horizontal & Vertical working feature

Foot pedal with Emergency button

Bottom rolls driven by motor & gearbox

Cast iron body

Movable command panel seperate from the machine (PBH 45)

All rolls driven by motor & gearbox (PBH 45)

Top roll hydraulic movement up and down (PBH 45)

Top roll with digital readout (PBH 45)

Brake motor (PBH 45)

Optional Equipment

Bar twist device

Digital readout

Mono phase motor

Special support for angle irons

Special rolls (Pipe, profile, angle iron)

FAST ON SERVICE AND SPARE PARTS

DURMA provides the best level of service and spare parts with qualified personnel and spare parts in stock. Our experienced and professional service personnel are always ready at your service. Our professional training and application enriched courses will give you an advantage to use our machinery.



TÄGLICH AKTUALISIERTE LAGERLISTE UNTER www.hesse-maschinen.com

Vertrauen Sie auf über 70 Jahre Erfahrung!

Die Firma HESSE+CO wurde 1947 als Hersteller von Blechbearbeitungsmaschinen gegründet. Seit 1980 sind wir auf den Handel mit neuen sowie gebrauchten Blechbearbeitungs- und Werkzeugmaschinen spezialisiert. Wir haben ständig etwa 300 Maschinen in unserer 2.000 m² großen Ausstellungshalle, die nur 20 Minuten vom internationalen Flughafen Wien entfernt ist.

Trust in more than 70 years of experience!

HESSE+CO was established in 1947 as a manufacturer of sheet metal working machines. Since 1980 we are specialized in dealing with new and second hand sheet metal processing machines and machine tools. We always have approximately 300 machines available in our 2.000 m² showroom, which is located only 20 minutes from the Vienna International Airport, waiting for your inspection.

www.hesse-maschinen.com

