

## Hydraulic CNC press brake AD-Servo 30175

Bargain

Model	AD-Servo 30175
Brand	<u>HESSE by DURMA</u>
Condition	new
Year of manufacture	2026
pressing capacity	175 to
Bending length	3050 mm
Stock number	80198
Origin	Türkiye


✓ On stock



🕒 immediately, subject to prior sale

**€ 95.600,00**

€ 106.178,00

Leasing\*: € 1.806,84

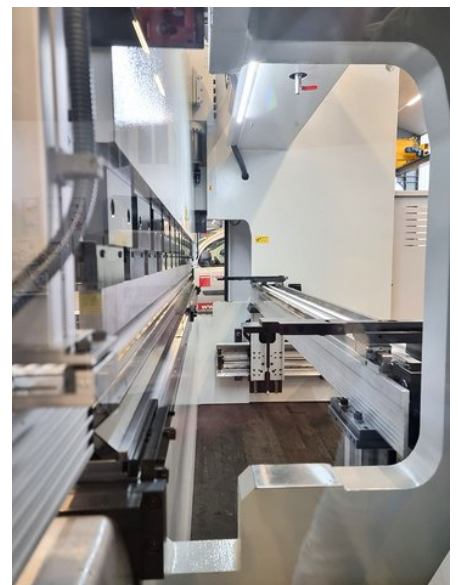

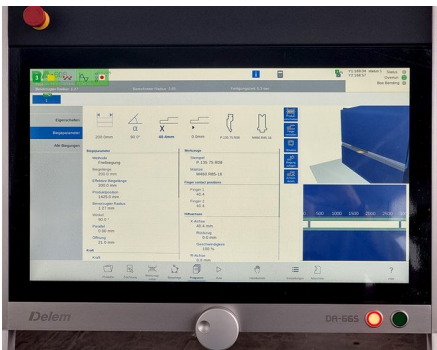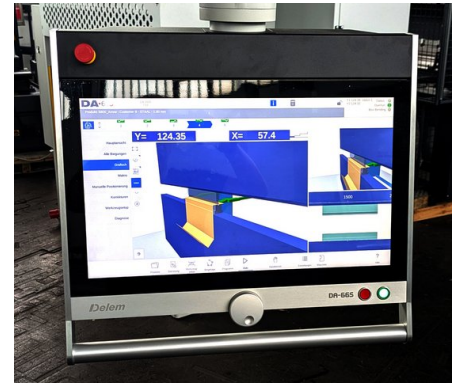

## General characteristics

pressing capacity	175 to
Bending length	3050 mm
Axes	Y1 / Y2 / X / R axis
Stroke	265 mm
Inside distance between side frames	2600 mm
Gap in side frame	410 mm
Daylight	530 mm
Power concept	hydraulic
rapid speed Y-axis	200 mm/s
Working speed Y-axis	10
Retractionspeed Y-axis	200
Back gauge travel X-axis	650 mm
Back gauge speed X-axis	500
Back gauge travel R-axis	250 mm
Table height	900 mm

Table width	104 mm
Motor	2 x 4 kW

## Dimensions and weight

Length	4250 mm
Width	1700 mm
Height	2750 mm
Weight	10900 kg

## Description

### 1 servo motor and pump per cylinder

Standard accessories:

4 axes (Y1, Y2, X and R)

Color graphics control Delem DA 66 S

- 2D graphical touch screen programming mode
- 3D machine representation, in simulation and production
- 24" high resolution color TFT
- Delem Modusys compatibility (module scalability and adaptivity)
- USB, peripheral interfacing
- User specific application support within the control's multitasking environment
- Sensor bending & correction interface
- Profile-S2D offline software

servo motorized back gauge on linear guides and ball screws

back gauge finger blocks on double linear guides

CNC crowning table

upper tool 1010 / A / 75 °, devided and cranked

4-V die block 60x60 2009 (V = 16,22,35 and 50 mm)

laser safety device Fiessler AKAS mounted on the upper beam

linear guided sheet support arms

according to CE rules

oilfilling

users manual in English or German

### Advantages of this concept:

- hydraulic works only while upper beam movement

- low energy consumption
- low noise level
- high speed

**optional equipment (time of delivery with these options 16 weeks):**

CNC control DELEM DA-69S 3D incl. PC software Profile-S with 3D file import option  
Further options as pneumatic or hydraulic tool clamping on request.

## Further information

### Brochures

- [Katalog Abkantpressen Durma AD-Servo Serie](#)
- [Euram Abkantwerkzeuge Gesamtkatalog](#)
- [WILA Abkantwerkzeug Katalog](#)
- [Rolleri Abkantlösungen](#)
- [Rolleri Klemmsysteme](#)

## Notice

Prices ex location, excluding VAT.

The [General Terms and Conditions of Delivery](#) of the Austrian Association of the Machine and Steel Construction Industry apply.

We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.

\* Monthly net leasing rate, leasing period 60 months, no down payment, 5% residual value, subject to a positive credit check. The leasing conditions of [GRENKELEASING GmbH](#) apply. Valid for lessees based in Austria.