Magnetic drilling machine PRO-40 AD

Model	PRO-40 AD
Brand	PROMOTECH
Origin	Poland


approx. 2 - 4 weeks from order

€ 1.055,00







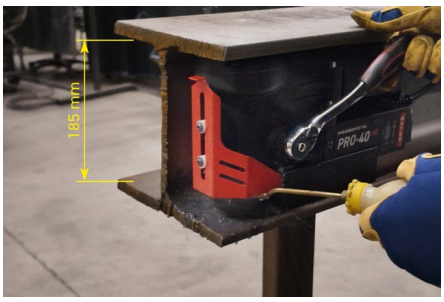

General characteristics

Drilling capacy mild steel	12 mm
Taper	19 mm Weldon
Motor power	1.1 kW
Max. drilling capacity	12 mm
Max. core drill capacity	40 mm
Max. cutting depth	40 mm
Stroke	45 mm
Motor speed	370 rpm

Hesse + Co Maschinenfabrik GmbH
IZ Nö Süd, Straße 4, Objekt 8
A-2351 Wiener Neudorf
www.hesse-maschinen.com
T +43-2236-63870-0
F +43-2236-63662
office@hesse-maschinen.com

Min. workpiece thickness	6 mm

Dimensions and weight

Length	400 mm
Width	126 mm
Height	185 mm
Weight	10 kg

Description

PRO-40 AD is a low profile mag drill, that fits in the tightest of spots.

Perfect solution for any applications in confined spaces, where typical mag drills are too large.

Its powerful motor enables drilling of holes up to 40 mm (1-9/16”) in diameter and up to 40 mm (1-9/16”) deep.

An innovative ultra-strong magnetic base with high performance on air gaps makes it possible to work even on painted, rusted or thin surfaces.

Magnetic Power Adhesion Control (MPAC) protects both the drill and the operator from working on too thin or inadequate surfaces, preventing the motor from engaging if the adhesive force is dangerously low.

PRO-40 AD accepts both TCT and HSS cutters as well as twist drill drills with 19,05 mm (3/4”) Weldon shank.

Features&benefits:

• Low profile mag drill of 185 mm height only
• Ultra-strong magnetic base with 1009 kgf (9900 N) holding force
• Compact and lightweight design of just 10 kg
• Milling capacity up to 40 mm with annular cutters
• Accepts also twist drills with 19,05 mm (3/4”) Weldon shank
• Extended stroke of 45 mm allows up to 40mm depth of cut
• Magnetic Field Shape Control (MFSC) provides maximum holding power on thin materials
• Integrated swarf guard
• Detachable feed lever (feat. ratchet) can be fixed from either side
• Lifting handle for easy transportation
• Cooling with a bottle

Standard set includes:

• Drilling machine
• Plastic box
• Handle
• Pilot pin 6.34 x 102 mm for HSS cutters
• Pilot pin 7.98 x 103 mm for TCT cutters
• Safety strap

• Hex wrench 4 mm

• Operator’s Manual

Options (prices on request):

Cutter extension

Coolant bottle with nozzle 250ml

Further information

Brochures

- Katalog Magnetbohrmaschine Promotech PRO-40 AD
- Modellübersicht Promotech Magnetbohrmaschinen

Product video

- vvpqxhye3wk.youtube

Notice

Prices ex location, excluding VAT.

The General Terms and Conditions of Delivery of the Austrian Association of the Machine and Steel Construction Industry apply.

We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.