

## Precision-centre lathe WEILER Praktikant GS


|                          |                      |
|--------------------------|----------------------|
| Model                    | WEILER Praktikant GS |
| Condition                | used                 |
| Year of manufacture      | 2011                 |
| Swing over bed           | 320 mm               |
| Distance between centers | 650 mm               |
| Stock number             | 10192                |
| Origin                   | Germany              |

✓ On stock

🕒 immediately, subject to prior sale

**€ 26.700,00**



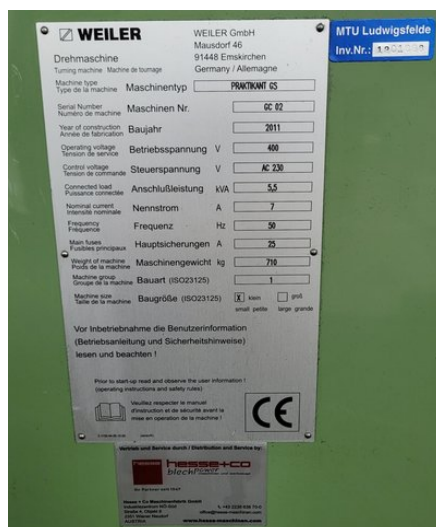

## General characteristics

|                          |                  |
|--------------------------|------------------|
| Swing over bed           | 320 mm           |
| Distance between centers | 650 mm           |
| Centre height            | 160 mm           |
| Spindle bore             | 40 mm            |
| swing over cross slide   | 192 mm           |
| Width of bed             | 205 mm           |
| Spindle nose / DIN55027  | 5                |
| Spindle taper            | 5 M              |
| Spindle speed steps      | 16               |
| Spindle revs             | 48 - 2500 rpm    |
| Number of feeds          | 24               |
| Longitudinal feed range  | 0.02 - 0.63 mm/r |
| Cross feed range         | 0.006 - 0.2 mm/r |
| Metric thread range      | 0.25 - 8 mm      |
| Inch thread range        | 80 - 2 Tpi       |
| Module thread range      | 0.2 - 4          |
| DP thread range          | 200 - 5          |
| Cross slide travel       | 150 mm           |
| Top slide travel         | 100 mm           |
| Tailstock quill diameter | 40 mm            |
| Tailstock quill taper    | 3 MK             |
| Tailstock travel         | 85 mm            |
| Motor                    | 2,4 / 3 kW       |

## Dimensions and weight

|        |         |
|--------|---------|
| Length | 1582 mm |
| Width  | 715 mm  |
| Height | 1245 mm |
| Weight | 720 kg  |

## Description

Heidenhain 3-axis digital readout

**New** Röhms 3-jaw chuck, 160 mm diameter, with internal and external jaws

Quick-change tool post with one rectangular insert and one round insert

Quick-release collet chuck with collets from 3 to 29 mm diameter (in 1 mm increments)

Live centre

Drill chuck

Chuck guard

Lead and feed screw guard

Motor brake

Coolant system

Mounting feet

Operating instructions in German with CE declaration of conformity

## Further information

### Brochures

- [Weiler - technische Beschreibung](#)

### Product video

- [akasbow3kfa.youtube](https://www.youtube.com/watch?v=akasbow3kfa)

## Notice

Prices ex location, excluding VAT.

The [General Terms and Conditions of Delivery](#) of the Austrian Association of the Machine and Steel Construction Industry apply.

We only sell under retention of title, the goods remain our unrestricted property until they have been paid for in full.

Price changes and errors excepted.